



## Specifications:


<b>Type</b>	Digital Controller
<b>Series</b>	LC-16 Series
<b>Dimension</b>	120 x 92.6 x 43 mm
<b>Communication Type</b>	RS232
<b>Controller Supply Voltage</b>	12V ~ 24VDC
<b>Output Current</b>	1A / Channel
<b>Lighting (Input Voltage)</b>	Max. 48V
<b>Lighting (Output Voltage)</b>	Based on lighting input voltage
<b>Digital Input</b>	4
<b>Digital Output</b>	4
<b>No. of channel</b>	4 Channels
<b>Mode</b>	Constant, Strobe & Trigger
<b>Strobe Width</b>	0 - 99.99ms (0.01ms / step)
<b>Trigger Delay</b>	< 25μs

## Part Number:

DK-LC-16-4CH-COM-PS5.0A-XX

## Product Naming Convention:

DK-LC-16-4CH-COM-PS5.0A-XX




1. Demo Kit
2. Light Controller
3. Series 16
4. 4 Channels
5. COM Port Communication
6. Power Adapter Current: 5.0A
7. Power Cord Type: EU/US/UK

## Box Dimension:

L 333 x W 221 x H 100

## Application

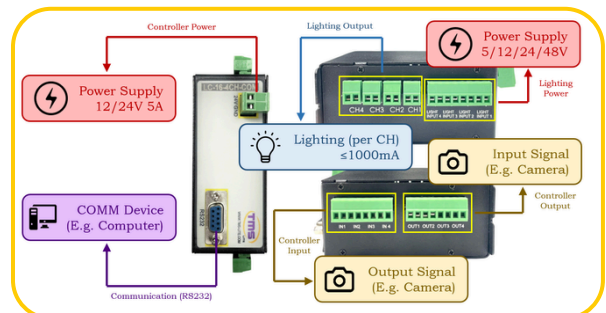

## Features

- Intensity control for LED lighting in machine vision applications
- 4 channels with individual settings
- 3 modes of operation for diverse application support

## Advantages

- Programmability
- Able to control multiple lighting
- Software control

## Benefits

- Compact size
- Fast respond in strobing
- Easy to install