
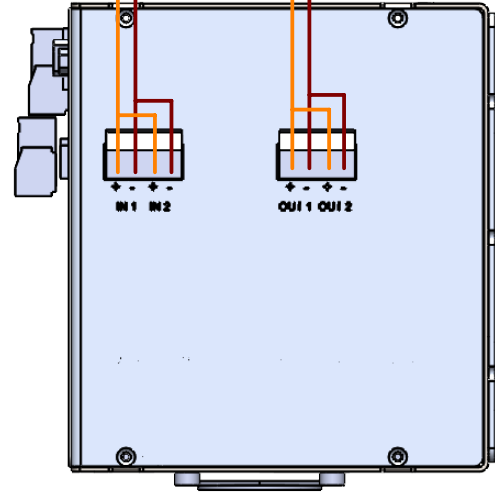
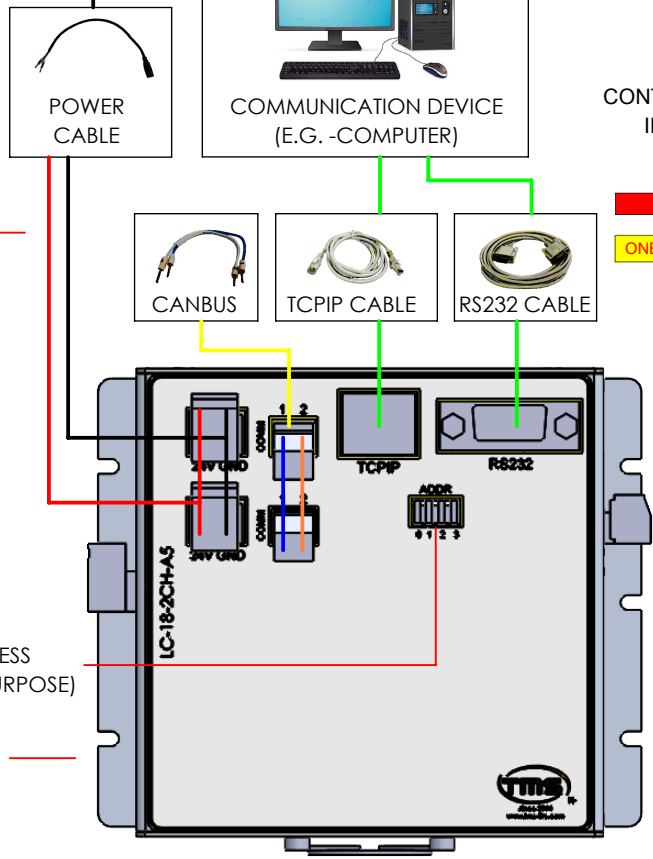
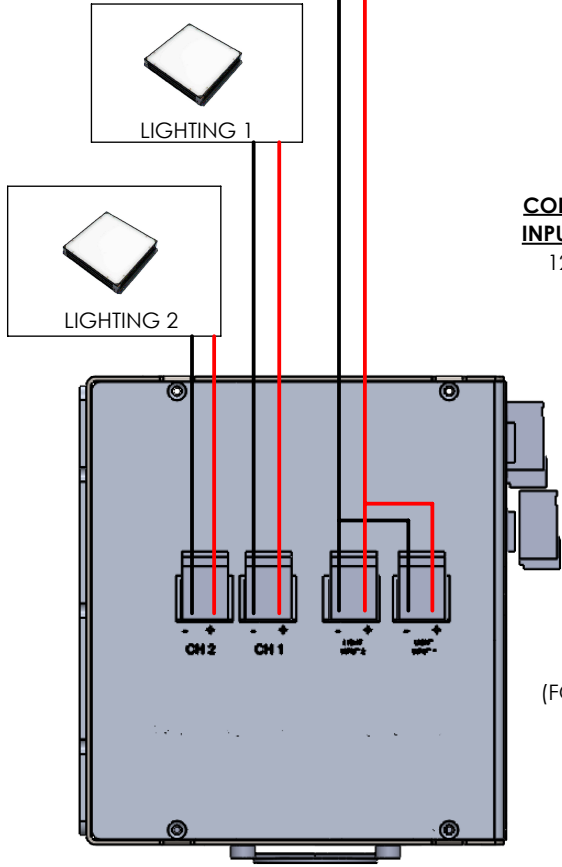
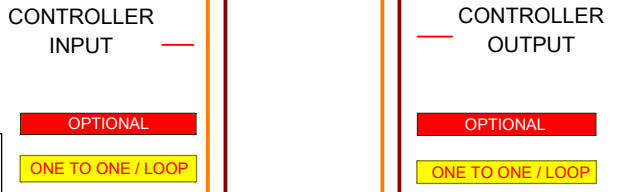
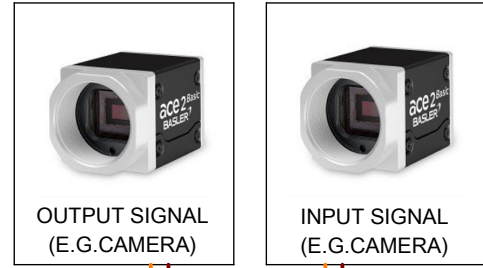


| REVISIONS | | | |
|-----------|--------------|---------|--------------|
| REV. | DESCRIPTIONS | EDIT BY | DATE:(d/m/y) |

CONSTANT & STROBE & TRIGGER:
 CH1-2: 5V / 5000mA / 25W
 CH1-2: 12V / 5000mA / 60W
 CH1-2: 24V / 5000mA / 120W
 CH1-2: 48V / 5000mA / 240W
 *per channel

ONE TO ONE / LOOP

*IF LIGHTING INPUT POWER
 SAME AS CONTROLLER INPUT POWER,
 IT CAN LOOP WITH SAME
 POWER SUPPLY

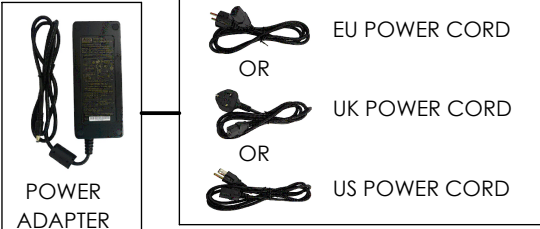

BOARD ADDRESS
 (FOR CASCADE PURPOSE)

LC-18-2CH-A5

| | | |
|-----------|------------|-----------|
| DESIGN BY | KANG | UNIT: MM |
| CHECK BY | KB TAN | SIZE A4 |
| DATE | 29/11/2024 | REVISION: |
| MATERIAL | - | 01 |
| FINISHING | - | SCALE: |
| QTY | - | 1:1 |

PRODUCT SERIES: LC-18 SERIES



| | | |
|---------|----------------|-----------------|
| TITLE | DRAWING LAYOUT | GEN. TOLERANCES |
| PART NO | - | X ±0.15 |
| DWG NO | LC-18-2CH-A5 | X.X ±0.1 |
| | | X.XX ±0.05 |
| | | SHEET 1 OF 1 |