



Part Number:

DK-LC-20-SQT-16CH-PS11.6A-XX

Product Naming Convention:

DK-LC-20-SQT-16CH-PS11.6A-XX

1 - 2 - 3 - 4 - 5 - 6 - 7

1. Demo Kit
2. Light Controller
3. Series 20
4. Sequence Trigger
5. 16 Channels
6. Power Adapter Current: 11.6A
7. Power Cord Type: EU/US/UK


Specifications:

Type	Digital Controller
Series	LC-20 Series
Dimension	156 x 132.85 x 91 mm
Communication Type	RS232
Controller Supply Voltage	12V ~ 24VDC
Output Current	0.55A (CON/STB) / Channel
Lighting (Input Voltage)	Based on controller supply voltage
Lighting (Output Voltage)	Based on controller supply voltage
Digital Input	1
Digital Output	1
No. of channel	16 Channels
Mode	Constant, Strobe & Trigger
Strobe Width	0 – 999.99ms (0.01ms / step)
Trigger Delay	≤ 25us

Box Dimension:

L ?? x W ?? x H ??

Application

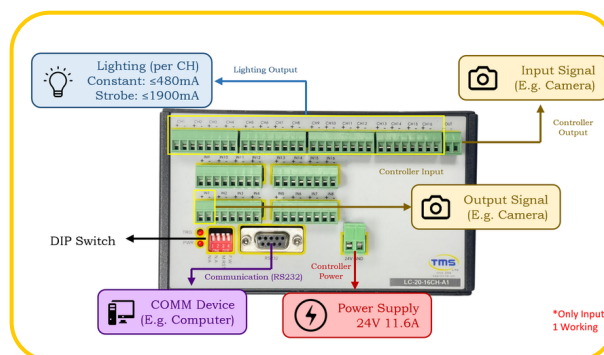

Features

- Intensity control for LED lightings in machine vision applications
- 16 channels with individual settings
- 2 modes of operation for diverse application support

Advantages

- Programmability
- Able to control multiple lighting
- Software control
- Able to sequence

Benefits

- Fast respond in strobing
- Easy to install