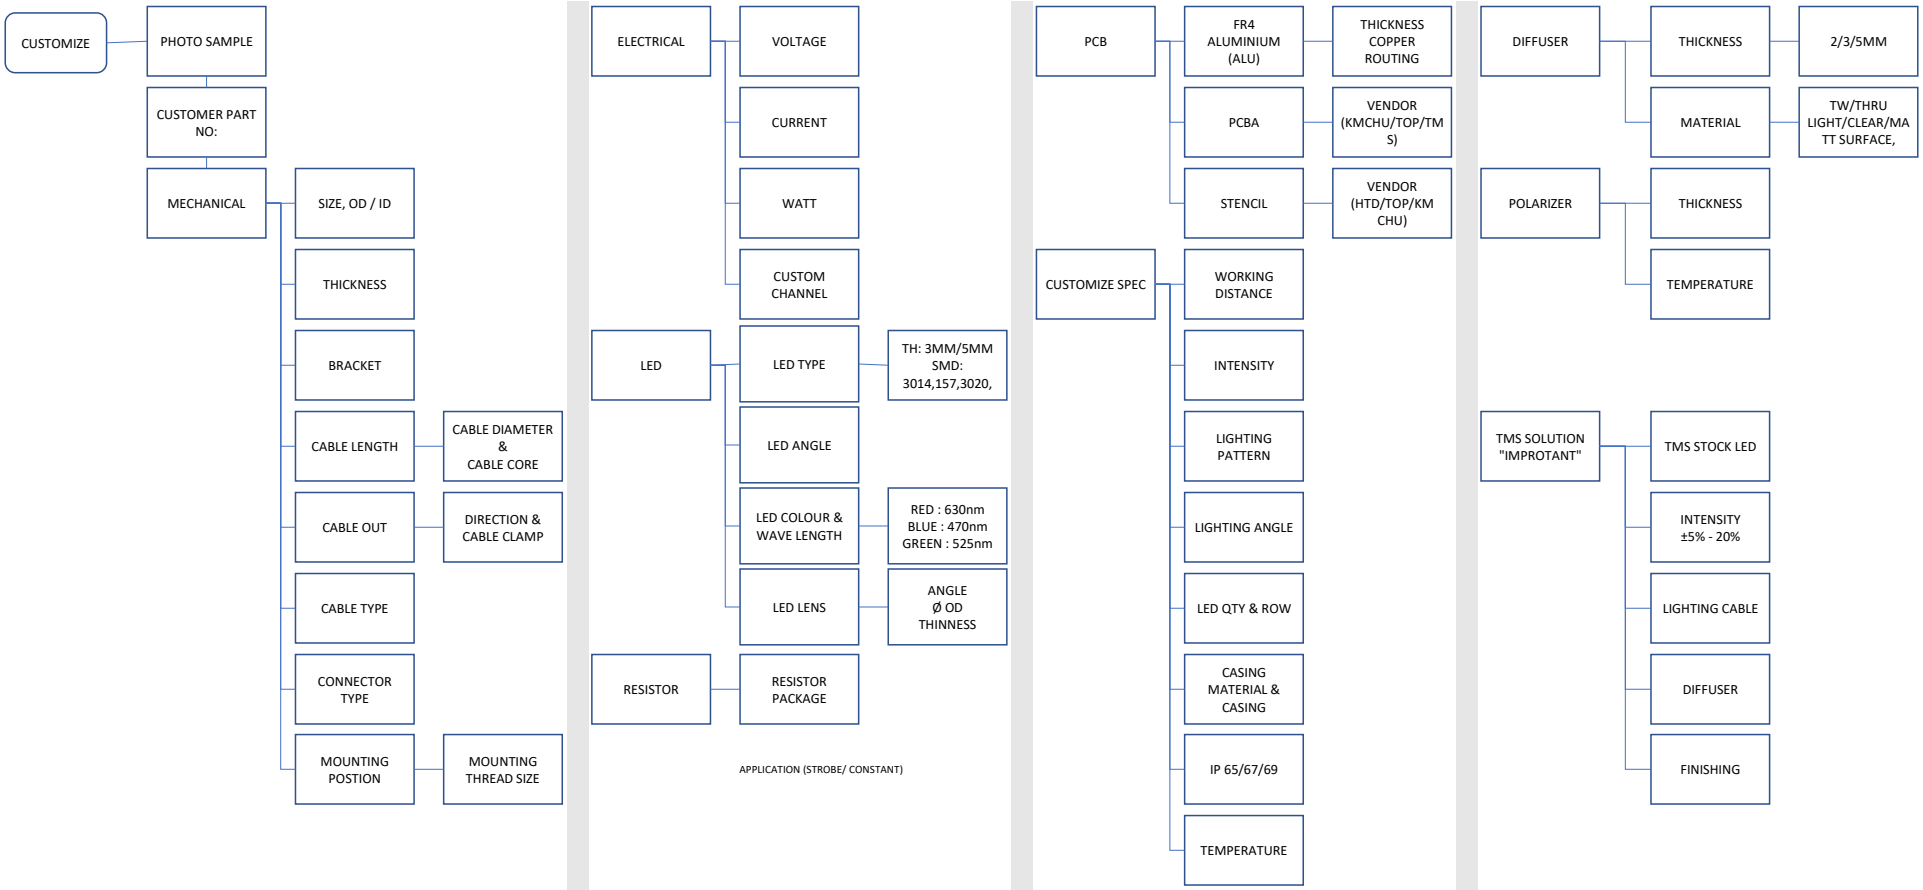
CUSTOMIZE
PHOTO SAMPLE
CUSTOMER PART NO:
MECHANICAL
SIZE, OD / ID
THICKNESS
BRACKET
CABLE LENGTH
CABLE DIAMETER & CABLE CORE
CABLE OUT
DIRECTION & CABLE CLAMP
CABLE TYPE
CONNECTOR TYPE
MOUNTING POSTION
MOUNTING THREAD SIZE
ELECTRICAL
VOLTAGE
CURRENT
WATT
CUSTOM CHANNEL
LED
LED TYPE
TH: 3MM/5MM SMD: 3014,157,3020,
LED ANGLE
LED COLOUR & WAVE LENGTH
RED : 630nm BLUE : 470nm GREEN : 525nm
LED LENS
ANGLE Ø OD THINNESS
RESISTOR
RESISTOR PACKAGE
APPLICATION (STROBE/ CONSTANT)
PCB
FR4 ALUMINIUM (ALU)
THICKNESS COPPER ROUTING
PCBA
VENDOR (KMCHU/TOP/TMS)
STENCIL
VENDOR (HTD/TOP/KMCHU)
CUSTOMIZE SPEC
WORKING DISTANCE
INTENSITY
LIGHTING PATTERN
LIGHTING ANGLE
LED QTY & ROW
CASING MATERIAL & CASING
IP 65/67/69
TEMPERATURE
DIFFUSER
THICKNESS
2/3/5MM
MATERIAL
TW/THRU LIGHT/CLEAR/MATT SURFACE,
POLARIZER
THICKNESS
TEMPERATURE
TMS SOLUTION "IMPROTANT"
TMS STOCK LED
INTENSITY ±5% - 20%
LIGHTING CABLE
DIFFUSER
FINISHING