




ILLUMINATOR DATA (ID)

HPD2-00-080-1-RGBW-24V

Lighting Dimension

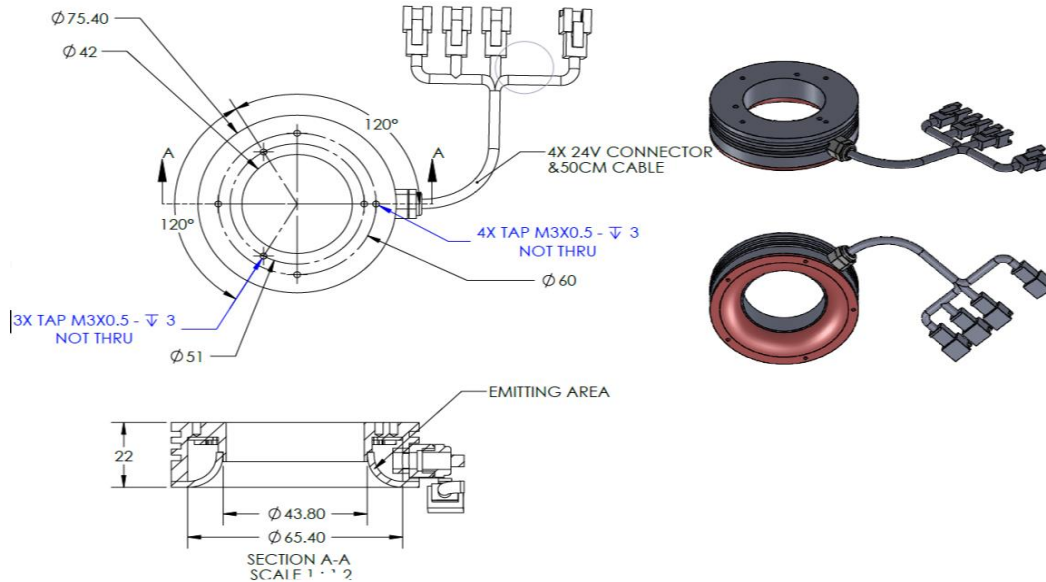

| Mechanical Information | |
|---------------------------|-----------|
| Casing Material | Aluminium |
| Storage Temperature Range | 0 - 45°C |
| Storage Humidity Range | 20 - 85% |
| Weight | 155 g |
| Length / Outer Diameter | 75.4 mm |
| Width / Inner Diameter | 42 mm |
| Thickness / Height | 22 mm |





ILLUMINATOR DATA (ID)

HPD2-00-080-1-RGBW-24V

| Lighting Information | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---|---------|---------|---------|---------|---------|---------|---------|---------|--------------------------|---------|---------|---|-------|-------|-------|-------|---|-------|-------|------|------|---|-------|-------|-------|-------|---|-------|-------|-------|-------|
| Part Number | HPD2-00-080-1-RGBW-24V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LED Color | Red | | | Green | | | Blue | | | White | | | | | | | | | | | | | | | | | | | | | | |
| Wavelength | 630 | | | 525 | | | 470 | | | refer to chromatic table | | | | | | | | | | | | | | | | | | | | | | |
| Working Distance | 54 mm | 64 mm | 74 mm | 54 mm | 64 mm | 74 mm | 54 mm | 64 mm | 74 mm | 54 mm | 64 mm | 74 mm | | | | | | | | | | | | | | | | | | | | |
| Intensity (±15%) | 1520 lx | 1280 lx | 1040 lx | 3820 lx | 3220 lx | 2640 lx | 4110 lx | 3400 lx | 2850 lx | 3310 lx | 2700 lx | 2280 lx | | | | | | | | | | | | | | | | | | | | |
| Illumination (number of row) | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Illumination Active Area | Active Length / Outer Dia. | | | | | | 65.4 mm | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Active Width / Inner Dia. | | | | | | 43.8 mm | | | | | | | | | | | | | | | | | | | | | | | | | |
| Emission angle | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Eye Safety Class (IEC62471) | EXEMPT | | | EXEMPT | | | II | | | EXEMPT | | | | | | | | | | | | | | | | | | | | | | |
| Chromaticity Table | <table border="1"> <tr> <td>X</td> <td>0.296</td> <td>0.287</td> <td>0.307</td> <td>0.311</td> <td>X</td> <td>0.311</td> <td>0.307</td> <td>0.33</td> <td>0.33</td> </tr> <tr> <td>Y</td> <td>0.276</td> <td>0.295</td> <td>0.315</td> <td>0.294</td> <td>Y</td> <td>0.294</td> <td>0.315</td> <td>0.339</td> <td>0.318</td> </tr> </table> | | | | | | | | | | | | X | 0.296 | 0.287 | 0.307 | 0.311 | X | 0.311 | 0.307 | 0.33 | 0.33 | Y | 0.276 | 0.295 | 0.315 | 0.294 | Y | 0.294 | 0.315 | 0.339 | 0.318 |
| X | 0.296 | 0.287 | 0.307 | 0.311 | X | 0.311 | 0.307 | 0.33 | 0.33 | | | | | | | | | | | | | | | | | | | | | | | |
| Y | 0.276 | 0.295 | 0.315 | 0.294 | Y | 0.294 | 0.315 | 0.339 | 0.318 | | | | | | | | | | | | | | | | | | | | | | | |
| For White colour only | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Electrical Information | | | | |
|---|--|--------|--------|--------|
| Rated Constant Voltage | 24V±2% | | | |
| Rated Constant Current | 90 mA | 90 mA | 90 mA | 90 mA |
| Power Consumption | 2.16 W | 2.16 W | 2.16 W | 2.16 W |
| Casing temperature, After 60 minutes operation | 47.6 C | | | |
| Max. continuous current of RED, GREEN & BLUE LEDs on at the same time | *It is not recommended to turn on Red, Green and Blue colour at the same time. Refer to Maximum Simultaneous Current Output section in the last page for maximum current that can be supplied for each colour. Failure in following this may results in damaging the lighting. | | | |

| Strobe Mode Specification | | | | |
|--|--|-------------------------|-------------------------|-------------------------|
| **Normal Strobe Voltage | 24 V | | | |
| **Normal Strobe Current | 90 mA | 90 mA | 90 mA | 90 mA |
| Overdrive Voltage Range | Min: 36 V Max: 48 V | Min: 36 V Max: 48 V | Min: 36 V Max: 48 V | Min: 36 V Max: 48 V |
| Overdrive Current Range | Min: 180 mA Max: 224 mA | Min: 202 mA Max: 246 mA | Min: 244 mA Max: 296 mA | Min: 236 mA Max: 289 mA |
| Max. pulse current of RED, GREEN & BLUE LEDs on at the same time | *It is not recommended to turn on Red, Green and Blue colour at the same time. Refer to Maximum Simultaneous Current Output section in the last page for maximum current that can be supplied for each colour. Failure in following this may results in damaging the lighting. | | | |
| Recommended Overdrive Voltage | 36 V | | | |
| ***Max. Trigger Pulse Duration | 10 msec | | | |
| ***Max. Duty Cycle | 10% | | | |



**Normal strobe means the lighting is operated using the rated power. Overdrive means the power supplied to the lighting exceeded the rated power.

***Overdrive condition must not exceed the max. trigger pulse duration and max. duty cycle. Failure in following this may results in damaging the lighting.



ILLUMINATOR DATA (ID)

HPD2-00-080-1-RGBW-24V

| Connection Information | | | |
|--|-------------|--------|--------------|
| Connector Type (Default) | JST SMR-03V | | |
| Cable Length | 50 cm | | |
| Pin Configuration  | Pin | Signal | Cable Colour |
| | 1 | LED + | Red |
| | 2 | N.C | - |
| | 3 | LED - | White |
| | 4 | - | - |
| | 5 | - | - |
|  | | | |








| Additional Information | |
|--------------------------------|--|
| Additional Cooling Method | Attached to machine part for better heat dissipation |
| Intensity Controller Selection | SD, ST, ANG, LC, SDA, SDP series |
| CE Conformity | YES |
| RoHS Compliance | YES |

| Application | |
|-------------------|---|
| Illumination Type | Diffused Ring Illumination |
| Application Use | Shining Surface and Food Packaging Inspection |



ILLUMINATOR DATA (ID)

HPD2-00-080-1-RGBW-24V

| Maximum Simultaneous Current Output Information | | |
|--|---------|---|
| Colour | Current | Remarks |
|  SINGLE COLOUR : RED | 0.5 A | TOTAL CURRENT OUTPUT : 0.5 A RECOMMENDED OVERDRIVE CURRENT : 1 A (36 V) ** OPTIMUM FOR SINGLE COLOUR |
|  SINGLE COLOUR : GREEN | 0.4 A | TOTAL CURRENT OUTPUT : 0.4 A RECOMMENDED OVERDRIVE CURRENT : 1.17 A (36 V) ** OPTIMUM FOR SINGLE COLOUR |
|  SINGLE COLOUR : BLUE | 0.45 A | TOTAL CURRENT OUTPUT : 0.45 A RECOMMENDED OVERDRIVE CURRENT : 1.21 A (36 V) ** OPTIMUM FOR SINGLE COLOUR |
|  COMBINE 2 COLOUR: RED & BLUE | 0.5 A | TOTAL CURRENT OUTPUT : 0.5 A ****[EXAMPLE : RED = 0.25 A , BLUE = 0.25 A] ****[OVERDRIVE STROBE MODE EXAMPLE : RED = 0.5 A , BLUE = 0.5 A] FOR COMBINE COLOUR TEMPERATURE CANNOT EXCEED MORE THAN 60°C ENSURE CURRENT MUST NOT EXCEED 0.5 A |
|  COMBINE 2 COLOUR: RED & GREEN | 0.5 A | TOTAL CURRENT OUTPUT : 0.5 A ****[EXAMPLE : RED = 0.25 A , GREEN = 0.25 A] FOR COMBINE COLOUR TEMPERATURE CANNOT EXCEED MORE THAN 60°C ENSURE CURRENT MUST NOT EXCEED 0.5 A |
|  COMBINE 2 COLOUR: GREEN & BLUE | 0.5 A | TOTAL CURRENT OUTPUT : 0.5 A ****[EXAMPLE : GREEN = 0.25 A , BLUE = 0.25 A] ****[OVERDRIVE STROBE MODE EXAMPLE : RED = 0.5 A , BLUE = 0.5 A] FOR COMBINE COLOUR TEMPERATURE CANNOT EXCEED MORE THAN 60°C ENSURE CURRENT MUST NOT EXCEED 0.5 A |
|  COMBINE COLOUR: RED, GREEN & BLUE | 0.5 A | TOTAL CURRENT OUTPUT : 0.5 A ****[EXAMPLE : RED = 0.16 A , GREEN = 0.16 A , BLUE = 0.16 A] ****[OVERDRIVE STROBE MODE EXAMPLE : RED = 0.33 A , GREEN = 0.33 A , BLUE = 0.33 A] FOR COMBINE COLOUR TEMPERATURE CANNOT EXCEED MORE THAN 60°C ENSURE CURRENT MUST NOT EXCEED 0.5 A |



ILLUMINATOR DATA (ID)

HPD2-00-080-1-RGBW-24V

| Lighting Pattern | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------|---|------------|-----------|----------|-----------|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|-----|--|------|--------------|--|--|
| Working Distance | TBA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Display and Image | TBA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Data Results | <table border="1"> <thead> <tr> <th>Horizontal</th> <th>Meas.(mm)</th> <th>Vertical</th> <th>Meas.(mm)</th> </tr> </thead> <tbody> <tr><td>90%</td><td></td><td>90%</td><td></td></tr> <tr><td>80%</td><td></td><td>80%</td><td></td></tr> <tr><td>70%</td><td></td><td>70%</td><td></td></tr> <tr><td>60%</td><td></td><td>60%</td><td></td></tr> <tr><td>50%</td><td></td><td>50%</td><td></td></tr> <tr><td>40%</td><td></td><td>40%</td><td></td></tr> <tr><td>30%</td><td></td><td>30%</td><td></td></tr> <tr><td>20%</td><td></td><td>20%</td><td></td></tr> <tr><td>10%</td><td></td><td>10%</td><td></td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Max.</th> <th>Meas.(cd/m2)</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> </tr> </tbody> </table> | Horizontal | Meas.(mm) | Vertical | Meas.(mm) | 90% | | 90% | | 80% | | 80% | | 70% | | 70% | | 60% | | 60% | | 50% | | 50% | | 40% | | 40% | | 30% | | 30% | | 20% | | 20% | | 10% | | 10% | | Max. | Meas.(cd/m2) | | |
| Horizontal | Meas.(mm) | Vertical | Meas.(mm) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 90% | | 90% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 80% | | 80% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 70% | | 70% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 60% | | 60% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50% | | 50% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 40% | | 40% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30% | | 30% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 20% | | 20% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10% | | 10% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Max. | Meas.(cd/m2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

