





Scan or Click the QR code for more information

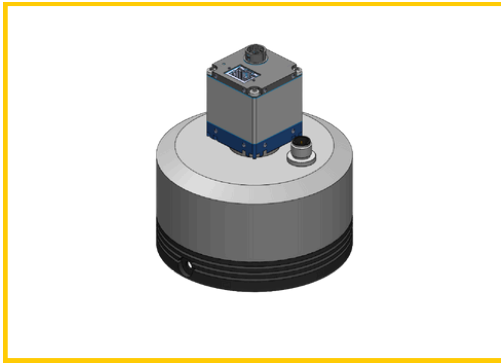

ALL IN ONE
Camera, Liquid Lens, Lighting


Application

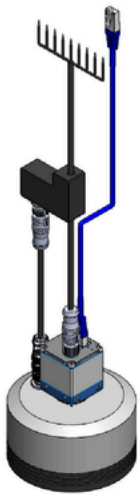

Connector Pinout

CONTROLLER M12 8PIN


PIN 1	24V
PIN 2	IN 1
PIN 3	GND
PIN 4	IN 2
PIN 5	OUT
PIN 6	5V
PIN 7	RX
PIN 8	TX




Specifications

Type	Driver Module
Series	DM Series
Dimension	
Electrical Specs	
Supply Voltage	24VDC
Max Power Consumption	12W
Input / Output	3 Digital Output (From Camera)
Camera Specs	
Communication Method	GigE (RJ45 Connector) (GenICam Standard) GEN <i>i</i> CAM
Megapixel	5 MP
Sensor Format	2/3"
Lighting Controller Specs	
Lighting Channels	6 Channels
Lighting Mode	Constant & Strobe
Strobe Width	0 - 99.99ms (0.01ms / step)
Trigger Delay	<= 30us


LED Wavelength

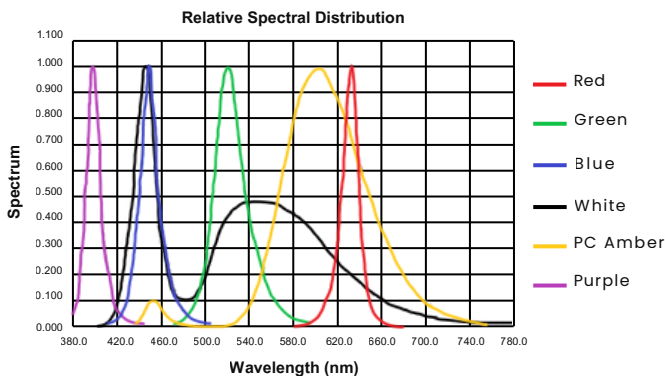


Red




Green




Blue



White



Amber



Purple

Features

- 6 different wavelengths
- Built-in driver
- Bundled with lighting, camera and liquid lens

Advantages

- Ideal for inspecting round objects and color differentiation
- Minimizes cabling requirements

Benefits

- Saves time and reduces costs
- Improves efficiency
- Optimizes space and enables a clean, streamlined installation