




ILLUMINATOR DATA-ID

CASC-00-015-X-G-24V

Lighting Dimension

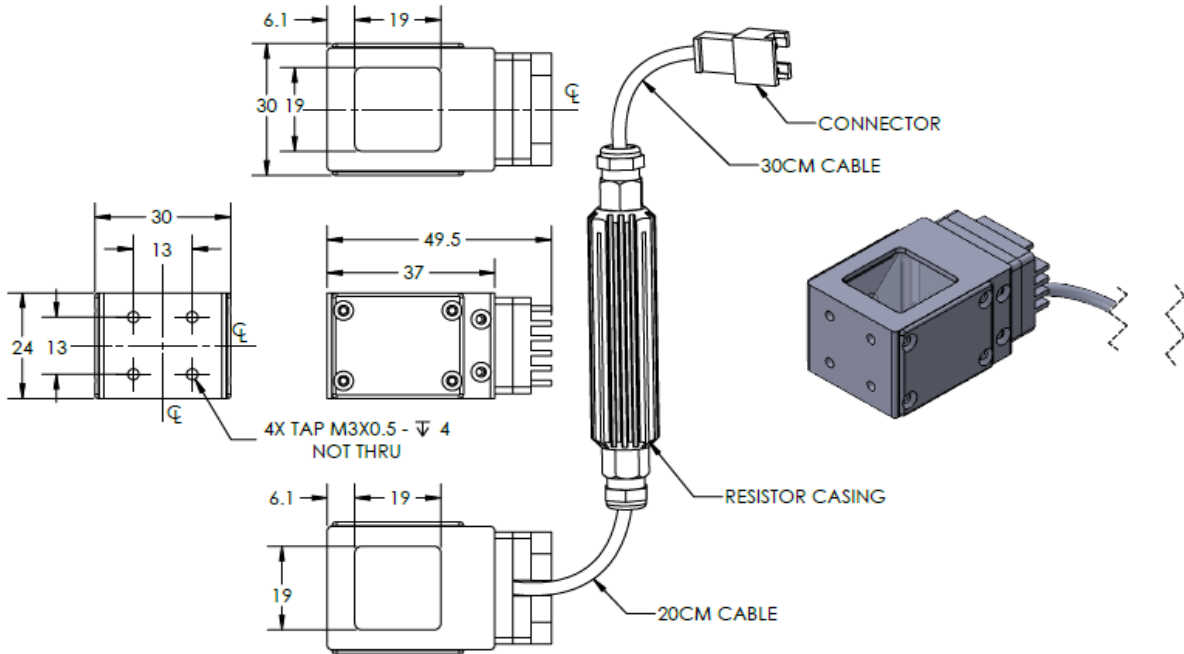


Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	100 g
Length / Outer Diameter	49.5 mm
Width / Inner Diameter	30 mm
Thickness / Height	24 mm



ILLUMINATOR DATA-ID

CASC-00-015-X-G-24V

Optical Information					
Part Number	CASC-00-015-X-G-24V				
LED Color	GREEN				
Wavelength	(nm)	525			
Intensity (±15%)	(Lux)	1416	7610	5140	4940
Working Distance	(mm)	10	20	30	40
Illumination (number of row)	X				
Illumination Active Area					
Active Length / Outer Diameter	(mm)	19			
Active Width / Inner Diameter	(mm)	19			
Emission angle	(deg.)	0			
Eye Safety Class (IEC62471)	EXEMPT				
Electrical Information					
Lighting Supply Voltage (constant voltage mode)	24V ± 2%				
Continuous Current	(mA)	90			
Power Consumption	(W)	2.16			
Lighting casing temperature, Operating after 60 minutes	°C	62			
Strobe Mode Specification					
Pulse Operation	YES				
Max. Lighting Supply Voltage (Constant voltage power supply)	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC			
Pulse Current, (Max. 10msec) (Constant current power supply)	(mA)	270			
Max. Trigger Pulse Duration	(msec)	10			
Duty Cycle	0-10%				
Additional Information					
Additional Cooling Method	Attached to machine part for better heat dissipation				
Intensity Controller Selection	ANG, ST, SD and SDA Series				
CE Conformity	YES				
RoHS Compliance	YES				
Connection					
Connector Type (Default):	JST SMR-03V				
Cable Length out from lighting :	(mm)	500			
Pin Configuration :		Pin	Signal	Cable Color	
		1	LED +	RED	
		2	N.C.	---	
		3	LED -	WHITE	
					
Application					
Illumination Type	Coaxial Illumination				
Applicattion Use	Surface inspection and alignment, wafer, metal surface, film, LCD and glass, pattern on PCB.				





ILLUMINATOR DATA-ID

CASC-00-015-X-G-24V

Uniform Graph (Relative Irradiation Strength) - Representative pattern

Lens focal length, $f = \text{Infinity}$
CWD = 100mm
LWD = 10mm, 20mm, 30mm, 40mm
Lighting angle: 0

Tolerance %	L X W
10%	11 X 7
20%	18 X 15
30%	21 X 17
40%	21 X 18

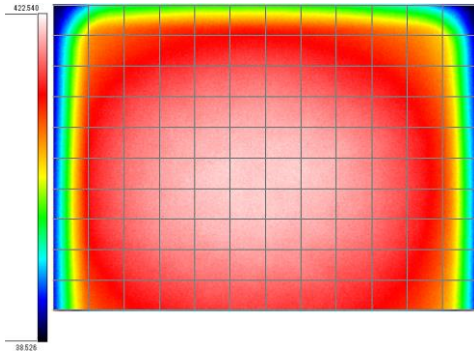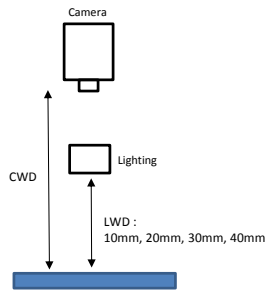

* 1 cell = 2mm x 2mm